

SUPRABLOC

LOW FREQUENCY ACCESS WITH
MULTIPLE OPERATIVES OR MECHANICAL ASSISTANCE

CPA3 TRIPLE LEAF

All Suprabloc units are post galvanised in excess of BS EN 1461. Post Galvanised coating thickness is available in 3 grades of finish to suit the specific project geographical location. Suprabloc units should be designed to cater for their intended application and should last the life of the project.


See chart on page 13 for the various grades of corrosion protection required to meet the designers obligations on Whole Life Costing for the project.



Inwardly tapered tray side to prevent jamming.

DDA Compliant Lifting points.
'Lift out operation.'

Varying tray depths

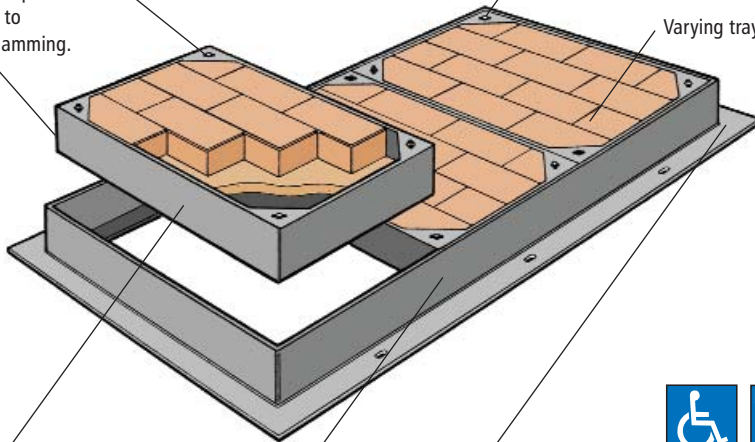

6mm thick steel cover for minimal deflection and ease of removal.

6mm thick steel frame for increased impact resistance.

Full flange for stability in service



Compliant products



Jones of Oswestry provides RIBA approved CPD support for designers and architects in the subject of true sustainable design.

For further details email marketingsupport@jonesofoswestry.com

GA galvanizers association

ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT

SUPRABLOC

CPA3 TRIPLE LEAF

GENERAL TECHNICAL DETAIL, COMPOSITION AND MANUFACTURE

APPLICATION

External paved areas where:-

- Aesthetic finish is important
- Public domain therefore anti slip and anti trip measures important
- DDA compliance is a design minimum
- Single person lift not required.

MECHANICS, PERFORMANCE

In order to ensure the covers continue to perform for their design life all Jones SUPRABLOC covers are tested to BS EN 124 load classifications as listed on pg 12.

Further design considerations include deflection under actual live loading to protect finishes from damage in service.

Damaged or proud infill constitutes the most common complaint by the general public and constitutes a large part of injury claims on local authorities from slip and trip.

COMPOSITION AND MANUFACTURE

Covers are fully welded fabrications using a minimum of 6mm thick structural steel plate.

Access covers are tapered inward at their base to ensure adequate clearance for removal in service. Lifting points are integral to each corner of access covers and include a fully welded, robust finish to cater for the filled weight of recessed access covers in service.

Underside of cover trays include heavy duty bracing to support the relevant load classification with reduced deflections when subject to live loading. Frame units include heavy duty 'T' section format around all sides of the unit. Pierced anchor points together with a full width seating ensures that any load is transmitted back to supports with less risk of localised failure in the bedding material.

PRODUCTS AND INFORMATION CAN BE AMENDED WITHOUT PRIOR CONSENT TO MAINTAIN THE COMPANY POLICY OF CONTINUED IMPROVEMENT

CLEAR OPENING SIZES CHART

All sizes in mm (length)	600		700		800		900	1000	1100	1200
	210-60	210-70	210-80	220-60	220-70	220-80				
2100	210-60	210-70	210-80	220-60	220-70	220-80	220-90			
2200	220-60	220-70	220-80	230-60	230-70	230-80	230-90			
2300	230-60	230-70	230-80	240-60	240-70	240-80	240-90	240-100	240-110	240-120
2400	240-60	240-70	240-80	250-60	250-70	250-80	250-90	250-100	250-110	250-120
2500	250-60	250-70	250-80	260-60	260-70	260-80	260-90	260-100	260-110	260-120
2600	260-60	260-70	260-80	270-60	270-70	270-80	270-90	270-100	270-110	270-120
2700	270-60	270-70	270-80	280-60	280-70	280-80	280-90	280-100	280-110	280-120
2800	280-60	280-70	280-80	290-60	290-70	290-80	290-90	290-100	290-110	290-120
2900	290-60	290-70	290-80	300-60	300-70	300-80	300-90	300-100	300-110	300-120
3000	300-60	300-70	300-80	310-60	310-70	310-80	310-90	310-100	310-110	310-120
3100	310-60	310-70	310-80	320-60	320-70	320-80	320-90	320-100	320-110	320-120
3200	320-60	320-70	320-80	330-60	330-70	330-80	330-90	330-100	330-110	330-120
3300	330-60	330-70	330-80	340-60	340-70	340-80	340-90	340-100	340-110	340-120
3400	340-60	340-70	340-80	350-60	350-70	350-80	350-90	350-100	350-110	350-120
3500	350-60	350-70	350-80	360-60	360-70	360-80	360-90	360-100	360-110	360-120
3600	360-60	360-70	360-80							

Always take the **largest clear opening dimension first** - from the column of sizes on the left of the chart. The second smaller dimension, is related to the sizes running diagonally down the right hand of the chart. Where the two columns meet, that box is the specifying code, i.e. 2400 x 700 = 240-70 specifying code.

USING THE CHART

ALTERNATIVE SIZES




The chart provides the specifier with numerous clear opening combinations. However it only represents clear opening sizes 100 mm increments, **any clear opening size is available, as STANDARD in 10mm increments**, and can be specified by deleting the last digit of the size, i.e. 2410 x 710 mm becomes an 241-71 specifying code.

SUPRABLOC

CPA3 TRIPLE LEAF

LOAD CLASSES, BS EN 124

EUROPEAN STANDARD FOR ACCESS COVERS


LOAD CLASSES	TEST LOAD	SUGGESTED AREAS OF USAGE	SPECIFYING CODE
 A15	15kN (1.5 Tonne)	Pedestrian and Cycle Areas	/A
		Recommended S.M.W.L. Not exceeding 1 Tonne	
 B125	125kN (12.5 Tonne)	Pavement, Pedestrian Zones, Car Parks & Verges	/B
		Recommended S.M.W.L. Not exceeding 6 Tonne	
 C250	250kN (25 Tonne)	Slow moving occasionally trafficked areas i.e Service Roads, Vehicular Access Areas, Parking Areas etc.	/C
		Recommended S.M.W.L. Not exceeding 11.5 Tonne	
D400	400kN	Contact our technical support team for advice on exceptionally heavy vehicled areas.	/SD
E600	600kN		/SE
F900	900kN		/SF

ALTHOUGH NOT COMPLYING WITH BS EN 124, OTHER INTERMEDIATE LOAD CLASSES ARE AVAILABLE, CONSULT OUR TECHNICAL DEPARTMENT

SECTIONAL DETAILS

Frame depths are manufactured for 50/65/80 and 100mm block depths.

i.e. 96, 106, 126 & 146 respectively.

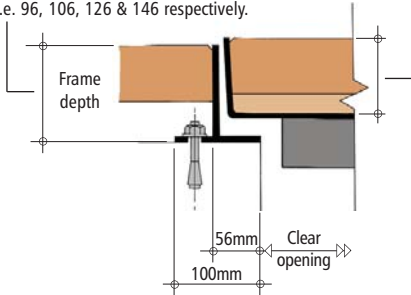

Internal tray depths are manufactured at 75, 85, 105 & 125 respectively.

(plain seated illustrated)

ACCESSORY SUFFIXES

To specify add the following suffixes to the professional specification code

- A1R - Single Rubber Seating Seal
- A2R - Double Rubber Seating Seal
- A3 - Unsealed / Plain Seated
- A4 - Ventilated
- B4 - Locking Down Bolts
- B8 - Pinhead Security Locking Bolts
- E1 - Stainless Steel Edge Trim
- E2 - Brass Edge Trim
- G1 - Large BS Lifting Points
- G2 - Threaded Lifting Points
- H1 - Service Identification (please specify)
- K1 - Solid Top Peep in (please specify position)
- K2 - Recessed Peep in (please specify position)
- N5 - Expanded Metal Mesh in Base of Tray
- X - Grade 304 Stainless Steel Construction
- Y - Grade 316 Stainless Steel Construction

DIMENSIONS

Installation dimensions, based around chamber clear openings are as shown. Although example clear opening sizes are tabulated, SUPRABLOC is available in any size to suit specific project requirements. Tray depths vary with the thickness of the slab or pavior. Generally tray depths are as tabulated and cater for all infill scenarios.

ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT

SUPRABLOC

CPA3 TRIPLE LEAF

FINISHES

How to use the Longevity Table

1. Locate your site on the Millennium map (E.g. Leeds - West Yorkshire)
2. Match the corrosion category square colour to the key (Leeds = 3 light blue)
3. Read down from Product Design Life to establish required minimum life i.e. 25 years.
4. Once minimum Product Design Life has been established, (20,25 or 30 years) cross reference with your site location category (1,2,3,4 or 5) to determine your required Duragalv finish. (Duragalv 100)
5. At the end of the specifying code Duragalv 100 needs to be added.

Coating suffix specifying codes:

- Duragalv70 = DG70
- Duragalv100 = DG100
- Duragalv140 = DG140

PRODUCTS AND INFORMATION CAN BE AMENDED WITHOUT PRIOR CONSENT TO MAINTAIN THE COMPANY POLICY OF CONTINUED IMPROVEMENT

Fabricated mild steel products, Hot-Dip Galvanised after manufacture = GALVANISED LONGEVITY TABLE					
Rate of corrosion of zinc (in microns per annum).	2.5	3	3.5	4	4.5
See Millennium Map for your site location or visit www.hdg.org.uk/map/index.htm	1	2	3	4	5
PRODUCT DESIGN LIFE					
20 YEARS Generally less than the normal minimum design life for product in public domain - UNACCEPTABLE WHOLE LIFE COSTING RETURN PERIOD	DURA GALV 70	DURA GALV 70	DURA GALV 70	DURA GALV 100	DURA GALV 100
25 YEARS Normal minimum design life for product in public domain - ACCEPTABLE WHOLE LIFE COSTING RETURN PERIOD	DURA GALV 70	DURA GALV 100	DURA GALV 100	DURA GALV 100	DURA GALV 140
30 YEARS Enhanced design life for product in public domain - PREFERRED WHOLE LIFE COSTING RETURN PERIOD	DURA GALV 100	DURA GALV 100	DURA GALV 140	DURA GALV 140	DURA GALV 140

Jones of Oswestry provide an extensive on-line support service. Simply attach your drawings or list your queries to techadvice@jonesofoswestry.com and one of our engineers will guide you to the most suitable solution.

HOW TO SPECIFY

PROGRESSIONAL EXAMPLE FOR SPECIFYING						
Ref DESCRIPTION	PRODUCT TYPE	CLEAR OPENING	LOAD CLASS	INTERNAL DEPTH OF TRAY	ACCESSORY SUFFIX	FINISHED COATING
DETAIL	(SUPRABLOC TRIPLE)	(2400mm x 700mm)	(B125)	(85mm)	(DOUBLE SEAL)	(SEE LONGEVITY TABLE)
PRODUCT Ref	CPA3	240-70	B	85	A2R	DG100
THE ABOVE EQUALS FULL SPECIFYING CODE OF = CPA3/240-70/B/85/A2R/DG100						

WHITTINGTON ROAD, OSWESTRY,
SHROPSHIRE, SY11 1HZ
TEL: 01691 653251
FAX: 01691 658222
EMAIL: techadvice@jonesofoswestry.com

JONES
OF OSWESTRY