

# CAVITY WALL

## CW/MH MEDIUM TO HEAVY DUTY

Lintels are manufactured from minimum 4mm thick structural steel plate with a minimum yield strength of 275N/mm<sup>2</sup>.

All lintels are post galvanised to a minimum zinc thickness dictated by building usage and geographical corrosivity ratings (see millennium map and lintel longevity table) to comply with BS 7543 and BS EN ISO 1461.

Minimum 100mm slope height in accordance with NHBC guidelines to present effective dpc and reduce risk associated with mortar bridging across cavity.

Lintel Height  
160mm

Factory fitted profiled polystyrene insulation. CFC Free. For Thermal performance requirements to parts L1 & L2 building regulations.

Inner leaf of lintel section to accept a constant 100mm wide masonry infill for maximum load bearing capacity when subject to high load ratios

**DURA GALV** 70

**DURA GALV** 100

**DURA GALV** 140

Cavity widths to lintel profile are tailored to suit specific wall construction to ensure sectional stability under load and reduced thermal transmittance through wall construction.

End Bearing  
150mm

**DUPLEX COATING**

Duplex paint system over post galvanised lintel, dictated by building usage and geographical corrosivity ratings (see millennium map and lintel longevity table).

PRODUCTS AND INFORMATION CAN BE AMENDED WITHOUT PRIOR CONSENT TO MAINTAIN THE COMPANY POLICY OF CONTINUED IMPROVEMENT

WHITTINGTON ROAD, OSWESTRY,  
SHROPSHIRE, SY11 1HZ  
TEL: 01691 653251  
FAX: 01691 658222  
EMAIL: techadvic@jonesofoswestry.com

**JONES**  
OF OSWESTRY

SECTION **1** PAGE **21**

# CAVITY WALL

## CW/MH MEDIUM TO HEAVY DUTY

### GENERAL TECHNICAL DETAIL, COMPOSITION AND MANUFACTURE

#### GENERAL

**Introduction.** The SUPERLINTEL CW/MH range of lintels, for external cavity wall applications, have a number of outstanding features which contribute to performance and durability characteristics which exceed BSEN 845-2:2003 recommendations.

These Features include:-

- 4mm thick structural steel plate used throughout for rigidity, long life durability and dimensional consistency.
- Optimum protection against corrosion; Lintels are hot-dip galvanised after manufacture.
- Lintels have undergone a testing programme by the Warrington Fire Research Consultancy in accordance with BS 476:Part 20: 1987. The test structure utilised a typical everyday wall construction, with 12mm plaster and skim only, over the inner leaf and blockwork. Full structural integrity was

maintained for in excess of 90 minutes.

- End bearings of 150mm as standard for high structural stability.  
*Non-standard end bearings can be supplied to order.*
- Choice from any cavity widths and flange options to enable 'U' values of less than  $0.35W/m^2K$  to be attained. Lintels are manufactured to suit the precise cavity and inner block widths for maximum load-bearing capacity and to achieve maximum 'U' values in conjunction with wall construction and hence meet requirements of Parts L1 & L2 building regulations.
- Mortar keying slots to flanges at bearings.

All lintels are Hot Dip Galvanised after manufacture, tested in compliance with BS EN ISO 1461 for zinc coatings of steel through the controlled inhouse galvanising "DURAGALV" process. Coating thicknesses vary in accordance with the requirements of BS 7543 and local corrosion categories levels.

For "DURAGALV" coatings above 70 microns, i.e. Duragalv 100 and 140, additional controlled processes are employed to ensure the heavier coatings adhere to the "minimum 4mm" specially selected steel plate required to accept these levels of heavy coatings.

To achieve protection for all five corrosion category areas, a further "DUPLEX COATING" paint system is applied to lintels, after galvanising, in the most severe areas of corrosion levels.

#### COMPOSITION AND MANUFACTURE

Lintels are manufactured from minimum 4mm thick steel structural plate with a minimum yield strength of 275N/mm<sup>2</sup>.

### LOADING RATIOS, SECTIONAL DETAIL / PROPERTIES

#### PERFORMANCE

**Mechanics.** Safe working loads for the CW/MH range of lintels are established by testing based upon the non-destructive test procedures for steel lintels as recommended in BSEN 845-2:2003.


Inner leaf of lintel section is designed to accept a constant 100mm wide masonry infill for maximum load bearing capacity when subject to high load ratios CW/MH lintels have been tested with high inner leaf loadings at load ratios equal to greater than 1:5.

#### REQUIRED FOR SPECIFYING

F - Facing leaf width

C - Cavity width

B - Inner leaf width




ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT

# CAVITY WALL

## CW/MH MEDIUM TO HEAVY DUTY

### LOADING TABLES

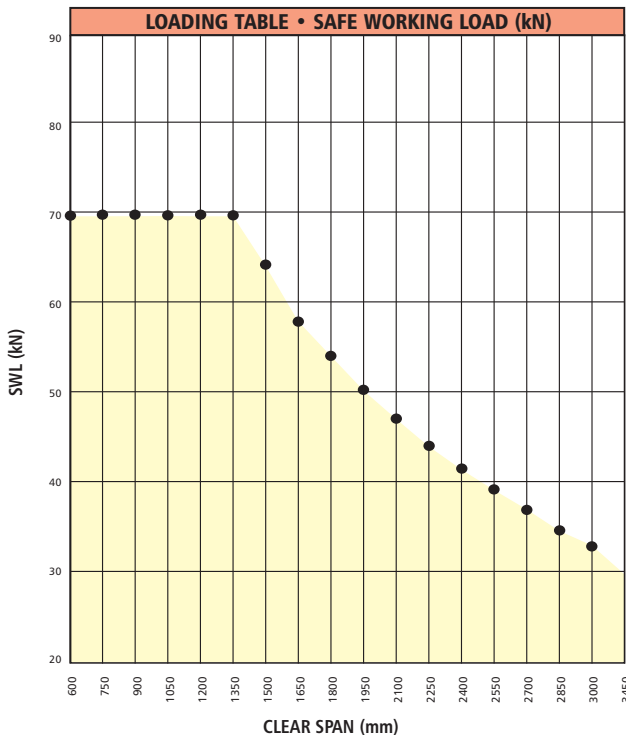

SWL - LOAD RATIO $\geq 1:5$			
CLEAR SPAN	(min) END BEARING	OVERALL LENGTH	SWL (kN)
600	150	900	70
750	150	1050	70
900	150	1200	70
1050	150	1350	70
1200	150	1500	70
1350	150	1650	70
1500	150	1800	64
1650	150	1950	59
1800	150	2100	54
1950	150	2250	50
2100	150	2400	47
2250	150	2550	44
2700	150	3000	37
2850	150	3150	35
3000	150	3300	33

PRODUCTS AND INFORMATION CAN BE AVOIDED WITHOUT PRIOR CONSENT TO MAINTAIN THE COMPANY POLICY OF CONTINUED IMPROVEMENT

### SECTIONAL PROPERTIES

EXAMPLE OF SECTIONAL PROPERTIES							
SECTION REFERENCE	FACING LEAF WIDTH (F)	CAVITY WIDTH (C)	INNER LEAF WIDTH (B)	WALL WIDTH	LINTEL WEIGHT/M kg	I <sub>xx</sub> cm <sup>4</sup>	Z <sub>xx</sub> cm <sup>3</sup>
CW/MH/102/50/100	102mm	50	100mm	252mm	21.20	993	97.2
CW/MH/102/70/100	102mm	70	100mm	272mm	22.47	1033.5	103.06
CW/MH/102/85/100	102mm	85	100mm	287mm	23.42	1111.2	111.72
CW/MH/102/100/100	102mm	100	100mm	302mm	24.36	1188.7	120.42
CW/MH/102/50/140	102mm	50	140mm	292mm	24.25	1201	120
CW/MH/102/70/140	102mm	70	140mm	312mm	25.50	1305	132
CW/MH/102/85/140	102mm	85	140mm	327mm	25.93	1316.8	134.95
CW/MH/102/100/140	102mm	100	140mm	342mm	27.31	14.59	149

WHITTINGTON ROAD, OSWESTRY,  
SHROPSHIRE, SY11 1HZ  
TEL: 01691 653251  
FAX: 01691 658222  
EMAIL: techadvic@jonesofoswestry.com

**JONES**  
OF OSWESTRY

# CAVITY WALL

## CW/MH MEDIUM TO HEAVY DUTY







### ARCHED LINTEL TYPES

Arched soffit Superlintels can be designed to suit any of the cavity wall lintel sections. There are 6 standard arch profiles shown, each providing full support to masonry arch shapes as drawn.

Steel flange thicknesses to lintel soffits are allowed for within a design to ensure continuity of brick coursing to outer leaf, in particular springing points at each end of lintel spans.


Where overall lintel height exceeds 450mm, webs are cropped to allow wall ties to be continued between both outer and inner leaf.

As with flat soffit Superlintels, the lintel section is dictated by wall construction, load and span. Arched forms may dictate minor changes to lintel section as shown, Arched lintels may require a separate damp proof course membrane, supplied by others.



ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT


### LOADING RATIOS, SECTIONAL DETAILS OF ARCHES

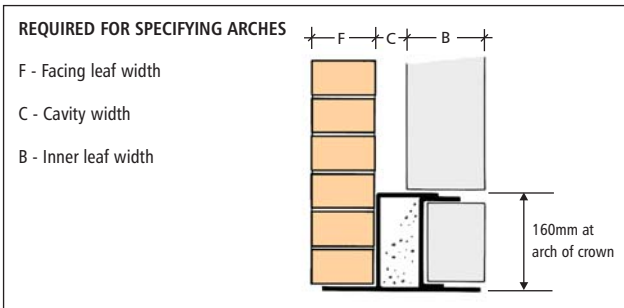

# CAVITY WALL

## CW/MH MEDIUM TO HEAVY DUTY





### TYPICAL INSTALLATION/CONSTRUCTION DETAILS

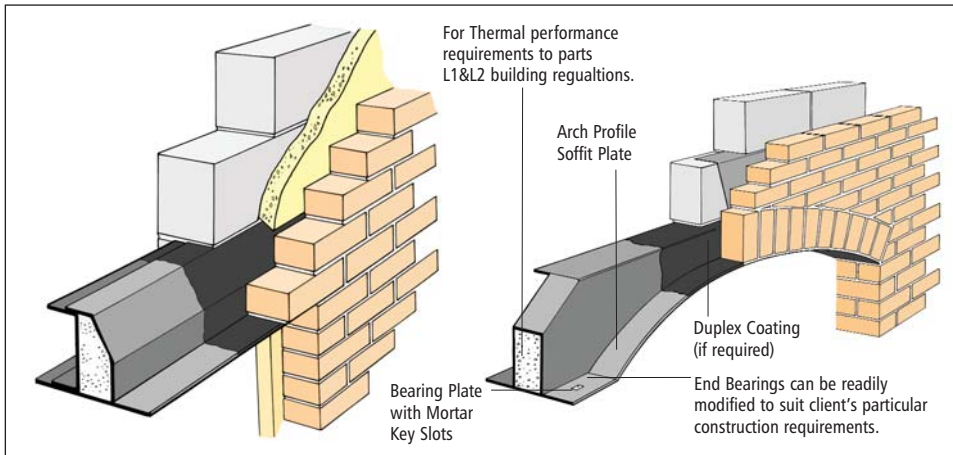

### ACCESSORY SUFFIXES

To specify add the following suffixes to the progressional specification code

- |   |  |   |
|---|--|---|
| <b>COL</b> Corbelled Outer Leaf                           | <b>JSF</b> Superarch steel arch former.          | <b>SS</b> Stainless steel lintel  |
| <b>CS</b> Concealed Soffit detail.                        | <b>M</b> Phosphate etch finish to lintel soffit. | Note: Finish coating suffix code i.e. DG140 (Duragalv 140) is not required when specifying stainless steel. |
| <b>G</b> Stepped outer flange (20 mm step unless stated). | <b>OBLC</b> Out of Balance Loading Conditions    | <b>U</b> Metal lathing plaster key.   |
| <b>JAF</b> Moulded arch former.                           | <b>SFC</b> Steel frame connection..              |   |

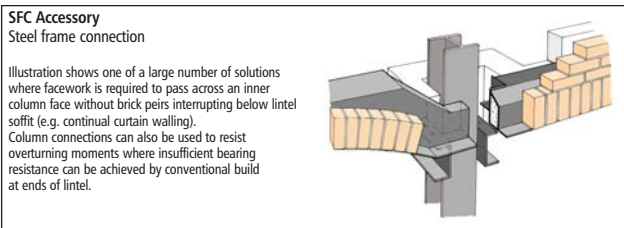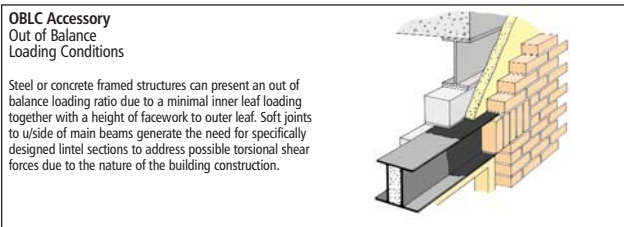

PRODUCTS AND INFORMATION CAN BE AVOIDED WITHOUT PRIOR CONSENT TO MAINTAIN THE COMPANY POLICY OF CONTINUED IMPROVEMENT

# CAVITY WALL

## CW/MH MEDIUM TO HEAVY DUTY

### FINISHES

#### How to use the Lintel Longevity Table

1. Locate your site on the Millennium map ( E.g. Leeds - West Yorkshire)
2. Match the corrosion category square colour to the key (Leeds = 3 light blue)
3. From the left hand column clarify required Construction Type / Minimum

- life (High quality Refurbishment = 60 years)
4. Read along from 60 years to category 3 (Minimum coating to be specified to comply with standards = Duragalv 100)
5. At the end of the specifying code DG100 needs to be added.

#### Coating suffix specifying codes:

- Duragalv70 = DG70
- Duragalv100 = DG100
- Duragalv140 = DG140
- Duraglav140 + Duplex Coating = DG140DC

Fabricated mild steel lintel, Hot-Dip Galvanised after manufacture		LINTEL LONGEVITY TABLE				
		Millennium Map corrosion category 1/2/3/4/5, and the minimum coatings to be specified in those areas, to comply with BS 7543 and BS EN 845-2:2003.				
See Millennium Map for your site location or visit <a href="http://www.hdg.org.uk/map/index.htm">www.hdg.org.uk/map/index.htm</a>		1	2	3	4	5
<b>CONSTRUCTION TYPE / MIN LIFE</b> Retail, Industrial and General Refurb. Minimum Life to Comply With BS 7543 <b>= 30 YEARS</b>	<b>DURA GALV 70</b>	<b>DURA GALV 70</b>	<b>DURA GALV 70</b>	<b>DURA GALV 70</b>	<b>DURA GALV 100</b>	
<b>CONSTRUCTION TYPE / MIN LIFE</b> Health, Education, New Housing High Quality Refurb. Minimum Life to Comply With BS 7543 <b>= 60 YEARS</b>	<b>DURA GALV 70</b>	<b>DURA GALV 70</b>	<b>DURA GALV 100</b>	<b>DURA GALV 140</b>	<b>DURA GALV 140</b> <b>DUPLEX COATING</b>	
<b>CONSTRUCTION TYPE / MIN LIFE</b> Civic and Other High Quality Buildings. Minimum Life to Comply With BS7543 <b>= 120 YEARS</b>	<b>DURA GALV 70</b>	<b>DURA GALV 140</b>	<b>DURA GALV 140</b> <b>DUPLEX COATING</b>	<b>DURA GALV 140</b> <b>DUPLEX COATING</b>	<b>DURA GALV 140</b> <b>DUPLEX COATING</b>	

Any lintel profile can be created by our in-house design team with spans ranging from 600mm and rises to suit. Contact our advice team on [techadvice@jonesofoswestry.com](mailto:techadvice@jonesofoswestry.com) for online support and free design service.

### HOW TO SPECIFY

PROGRESSIONAL EXAMPLE FOR SPECIFYING										
Ref DESCRIPTION	MAIN PRODUCT CODE						THESE REQUIRED WHEN SPECIFYING ARCHES			
	WALL TYPE	LOADING	FACING LEAF WIDTH (F)	CAVITY WIDTH (C)	INNER LEAF WIDTH (B)	SPAN	ARCH TYPE	ARCH RISE	ACCESSORY SUFFIX	FINISHED COATING
DETAIL	(CAVITY WALL)	(MEDIUM TO HEAVY)	(102mm)	(70mm)	(140mm)	(2100mm)	(A2 = SEGMENTAL)	(450mm)	(METAL LATHING KEY)	(SEE LONGEVITY TABLE)
PRODUCT Ref	CW	MH	102	70	140	2100	A2	450	U	DG100
THE ABOVE EQUALS FULL SPECIFYING CODE OF = CW/MH/102/70/140/2100/A2/450/U/DG100										

ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT